



CAT5 VGA & Audio extender BOX

CA5T/CA5R BOX

BOX Mechanical Drawing

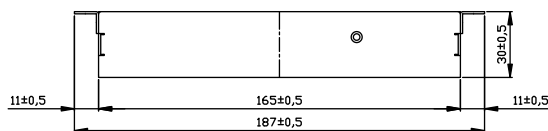


TOP VIEW

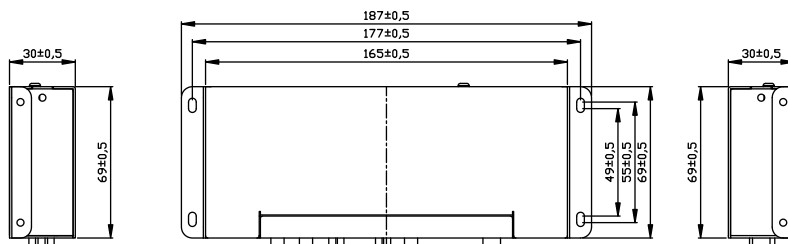

CA5T

CA5R

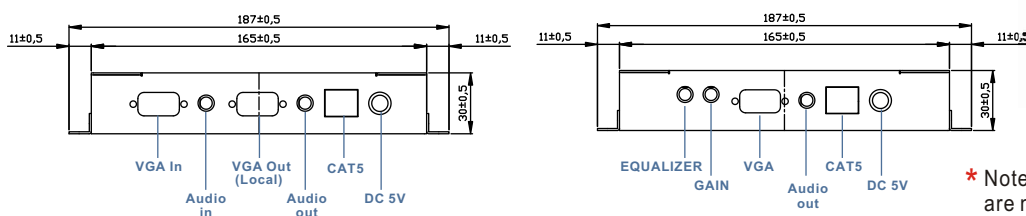

UNIT:mm

CA5T (Transmitter)



CA5R (Receiver)



* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

System Specifications

General :

- Dimensions : 165(W)x69(H)x30(D)
- Weight : Approx. 0.36 kg
- Power : 5V DC in
- Transmission distance : up to 100M
- Resolution : up to 1600 x 1200
- Power Consumption : CA5T<1W ; CA5R < 2W

CA5T Input/Output:

Input	Output
• Power 5V	• CAT5
• VGA	• VGA(local)
• Audio	• Audio(local)

CA5R Input/Output:

Input	Output
• Power 5V	• VGA
• CAT5	• Audio


Transmission Notice

The image quality depends on the environment and the quality of cable. Using the shielding cable will be a better solution when the interference is strong in your environment.

Feature :

The CA5T/CA5R BOX is a CAT5 VGA& audio signal extender device. The VGA and audio signal can be transfer up to 100 meters via CAT5 cable, and the remote Resolution is up to 1600x1200. CA5T- box is transmitter that get signal from the video and audio source, and transfer the signal to the remote CA5R- BOX. CA5R-Box, the receiver, will output the Video & audio to the monitor.

Application Diagram :

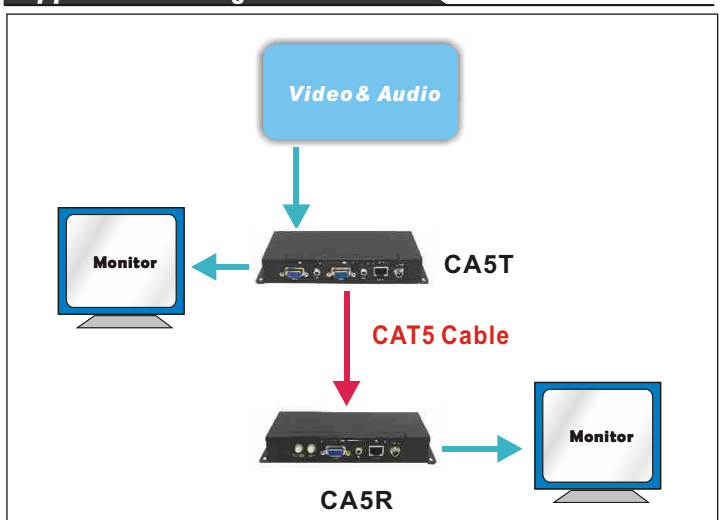

APPROVALS & CERTIFICATES

This product has been tested / approved by the following societies:



*All Product specifications are subject to change without notice. All copyrights and belong to their respective companies.

Rev.	Reasons	Revised Date
1.1	Spec Change	Dec-04-08
1.2	Spec Change	Dec-19-08
1.3	Picture Change	Dec-30-08