

Rugged Industrial PDA 4.3"

E430T

Product Features:

- 4.3" Sunlight Readable Panel with Projective Capacitive Multi-touch.
- Built-in Wi-Fi/ Bluetooth/ GPS / Optional 3G
- Built-in 2 Mega-pixel camera at front side and 5 Mega-pixel camera with LED at rear side
- Water and dust proof ID IP67 design
- Compliance with MIL-STD-810G for High/Low temperature, Vibration, Drop test
- Support Android 2.3 operating system
- Optional Windows Mobile 6.5

Product Specifications:


System Specification	Processor	TI Cortex A8 OMAP 1GHz
	System Memory	512MB SDRAM
	Storage	512MB NAND flash
	Operating System	Android 2.3 (Default) Windows Mobile 6.5 (optional) Windows CE 6.0 (optional)
Display Specification	Size	4.3"
	Resolution	480 x 800
	Brightness	270(typ.)
	Touch	Projective Capacitive Multi-touch
Wireless Communication	WLAN	802.11 b/g/n
	Bluetooth	Bluetooth V2.1+EDR
	WWAN	3.5G (optional)
	GPS	Built-in U-Blox GPS module
Mechanical and Environment	Dimensions (W x L x H)	5.2 x 3.23 x 0.85 in / 132.2 x 82 x 21.5 mm
	Weight	8 Oz / 220g (±1.5g)
	Operation Temperature	14 ~ 140°F / -10 ~ 60°C
	Operation Humidity	95% RH, non-condensing
	IP Proof	IP67
	Shock	Shock MIL-STD-810G M516.6
	Vibration	Vibration MIL-STD-810G M514.6
	Drop	MIL-STD-810G M516.6, 5 ft, Free to concrete
I/O Connectors	External I/O	1 x Micro USB 1 x 3.5mm Audio jack for microphone and headset
	Internal I/O	1 x SIM card slot 1 x Micro SD card slot
		1 x Microphone
	Internal Audio Device	1 x Earphone 1 x Speaker 1 x Volume + 1 x Volume -
		1 x Power button
		1 x Function button
		4 x Capacitive buttons: Home/ Menu/ ESC/ Search
	LED indicator	1 x LED indicator
Field Service Feature	Main Camera (Rear)	5 Mega-Pixel Camera with LED auxiliary light (Auto Focus)
	Face Camera (Front)	2 Mega-Pixel Camera
	Light Sensor	Built-in
	Proximity (Light) Sensor	Built-in
Power	Battery	3.7V 2400mAh Li-poly rechargeable battery
	Battery Operating Time	Low Use Case: 8.6Hr (Backlight at 10% duty cycle, default level, idle)
	Adapter	5V 1A Adapter



Order Information:

Model Name	Configuration
VM-E430T-3G	3G (HSUPA)

Drawing

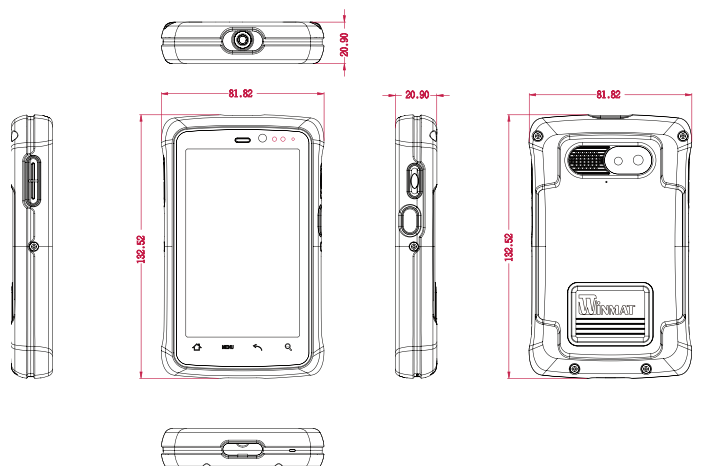

Rev.	Reasons	Revised Date
1.4	Spec Change	Jan.19.12
1.5	Spec Change	Feb.07.12
1.6	Spec Change	Feb.24.12