

21.5" OPS Display VM215A-A-CMS

Features

- 21.5" TFT LCD with resolution 1920x 1080
- Compliant with OPS module
- Optional Resistive touch

*Note


This 21.5" OPS Display is compliant with OPS (Open Pluggable Specification) that is promoted by Intel. Based on OPS standard, This OPS Display can be inserted into any OPS module to satisfy customers' flexible requirements.

Specifications

Model Name:VM215A-A-CMS

LCD Specification	Viewable Size Image	21.5" (16:9)
	Active Display Area(mm)	476.64(H) x 268.11(V)
	Pixel Pitch(mm)	0.248(H) x 0.248(W)
	Number of Pixels	1920 x 1080
	Contrast Ratio	1000:1(typ.)
	Display Color	16.7M(8 bits/colors)
	Brightness(cd/m ²)	250(typ.)
	Viewing Angle(CR>=10)	-89~89(H); -89~89(V)
	Synchronization Range	31.5~80.0KHz/60~75Hz
	Recommended Resolution	1920x1080 @60Hz
	Touch Screen	Optional Resistive touch
Display I/O Interface	Signal Connector	15 pin D-sub
	DVI Input	Yes
	Audio Input	Yes
	RS232 Input	Yes
	Power Connector	12V DC in
	Module Slot	1 x OPS Module Slot
Power Requirement	Power Input	12V DC Input
Physical Characteristics	Dimensions(W x H x D)	500.6 x 22.1 x 303.2 mm
Environment	Operating Temperature	0°C ~50°C
	Operating Humidity	30% ~90% (non-condensing, RH)
	Mounting	VESA mounting
Certification	Electromagnetic	CE, FCC

Dimension

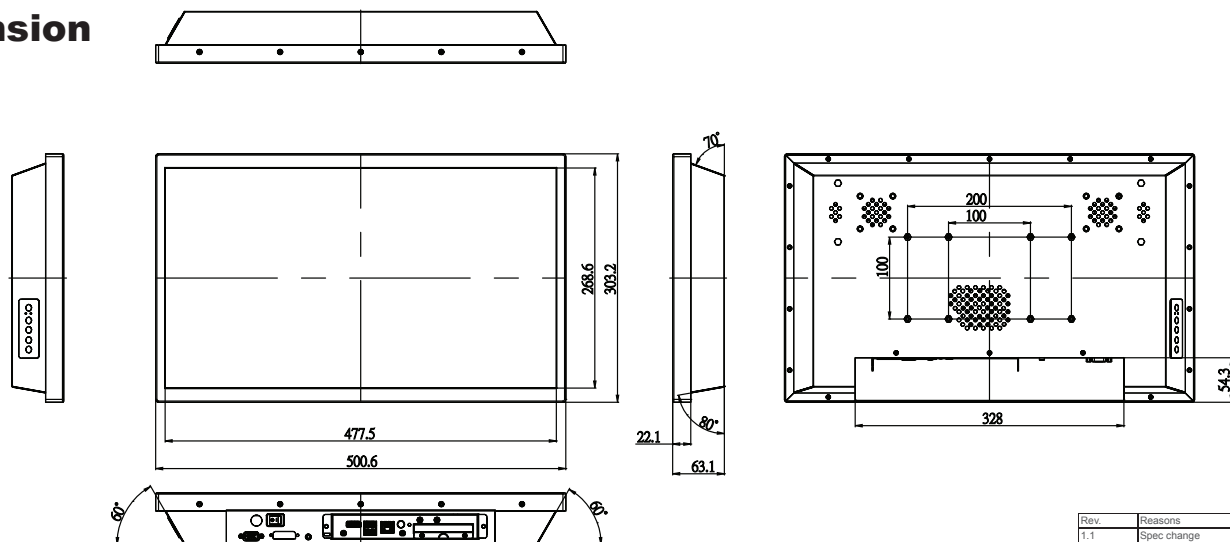

Rev.	Reasons	Revised Date
1.1	Spec change	Sep. 23.11
1.2	Revise model name	Mar. 06.12
1.3	Spec change	Mar. 15.12